



! WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified technician or the customer service member.

Package Contents



LED Wafer



J-Box Driver



Wire Connectors




Template


Wafer Installation

HOLE SIZE

- 3 inch: 3 5/64" (78mm)
- 4 inch: 4 21/64" (110mm)
- 6 inch: 6 19/64" (160mm)




- Copper—G
- White—N
- Black—L



5CCT


- 2700K
- 3000K
- 3500K
- 4000K
- 5000K




1 Create a cutout of the appropriate diameter using the template or the table above.

2 Open the J-Box cover and remove the knockout(s) on the side panel. Insert the supply cable using appropriate cable clamps (not included) if necessary. Connect the supply wires to the Wafer wires using the 3 connectors.

3 Select your desired lamp color with the CCT Switch.

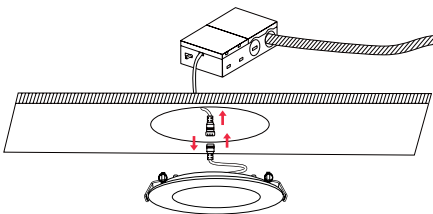

4 Insert J-Box through the mounting hole and secure it. Connect the Wafer's power cable to the J-Box.

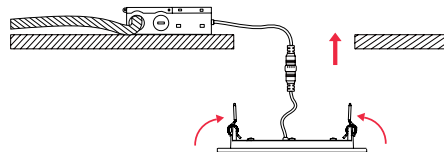

5 Push the spring-loaded clips upwards while inserting the fixture into the mounting hole. Release the clips and the fixture will be pulled flush into the ceiling.



6 Turn on the power and confirm the fixture functions properly.