





⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified technician.

Knuckle Mount Installation







1 Feed the power cord into the junction box or conduit. If j-box mounted, insert the threaded portion of the knuckle into the desired knock-out.

2 Make the wiring connections as shown in **Wiring Diagram 1**. If dimming is not required, make sure the dimming leads are capped.

3 To aim the fixture, use a hex key to loosen the screw. Move the fixture head to the appropriate position and tighten the screw to lock it in position.

4 Restore power and check that the fixture is working properly.

Trunnion Mount Installation







1 Mount the fixture to the desired surface. Feed the power cable to a junction box or other wiring compartment.

2 Make the wiring connections as shown in **Wiring Diagram 1**. If dimming is not required, make sure the dimming leads are capped.

3 To aim the fixture, loosen the machine screw with a screwdriver. Move the fixture head to the appropriate position and tighten the screw to lock it in position.

4 Restore power and check that the fixture is working properly.

Slip Fitter Mount Installation






1 Make the wiring connections as shown in **Wiring Diagram 1**. If dimming is not required, make sure the dimming leads are capped.

2 Slide the slip fitter into the pole, making sure that no wires are pinched. Tighten the set screws securely to lock the slip fitter in place.

3 To aim the fixture, use a hex key to loosen the machine screw. Move the fixture head to the appropriate position and tighten the screw to lock it in position.

4 Restore power and check that the fixture is working properly.

Field Selectable Wattage and CCT

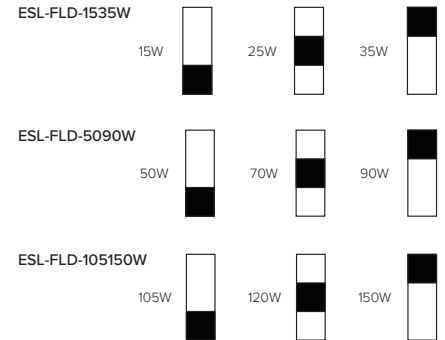


1 Remove the conduit plug as shown and set to the desired CCT / wattage. Replace the conduit plug securely to avoid water entry into the fixture.

2 For CCT tuning, adjust the slide switch to the desired kelvin setting as shown above.

3 For wattage tuning, adjust the slide switch to the desired setting as shown above.

Removable On/Off Photocell




1 Remove the photocell conduit cap from the lamp.

2 To enable or disable the photocell, use the integrated On/Off switch.

3 To remove and replace, unplug the connected wires from the back of the Photocell.

Wiring Diagram 1

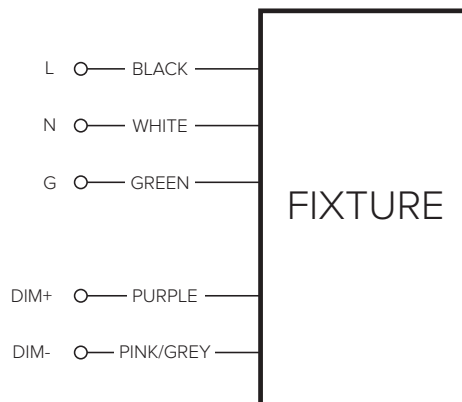

Note: Dimming wires must be capped if not in use.