



⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.


Installation




1 Open the fixture by removing the T-20 Security Torx screws on the side of the fixture.




2 Remove the LED and Frame assembly for installation.




3 In order to mount the fixture the backplate has to be pierced at the mounting locations (A). Use the appropriate sized drill bit as shown in Figure 1.




4 If the electrical connections will be made from a conduit remove one of the four conduit plugs (D) from the base and thread NPS conduit into the hole.




5 If the electrical connections will be made through a junction box drill the appropriate holes (C) for the size of your junction box as shown in Figure 1.



6 Align the backplate and mount it securely. Make power connections as shown below in Figure 2.



7 Reattach LED and Frame assembly, replace the T-20 Security Torx screws.



8 Reconnect power and test the fixture to ensure that it functions properly.

Figure 1

- A — 5/16" knockouts
- B — 9/16" knockouts
- C — #10 screw knockouts
- D — 1/2" NPS tapped holes
- E — 3 1/4" J-box template
- F — 4" J-box template
- G — Ground

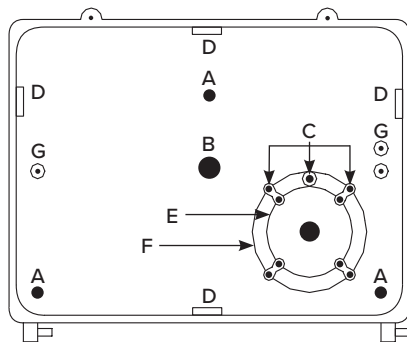


Figure 2

