



OPTUS SERIES
RECESSED FIXTURES

9 LIGHTS
IN ONE





CONSTRUCTION

- Recessed Bevel with Frosted Lens for Smooth, Even and Optimal Light Distribution
- Cast Aluminum Housing and Trim

SECURE MOUNTING

- Strong Spring Clips Secure Housing to Drywall, Ceiling Tiles or Downlight Mounting Plate

KEY FEATURES

- Acceptable for Use in IC or Non-IC Applications
- Damp Location Listed
- Energy Star Listed
- Rated life > 50,000 hrs
- Emergency Backup Capable

9 LIGHTS IN ONE



KELVIN ADJUSTABLE



WATTAGE ADJUSTABLE



6" OPTUS — 10 WATTS — 15 WATTS — 22 WATTS

8" OPTUS — 12 WATTS — 20 WATTS — 30 WATTS

ORDERING GUIDE & SPECS



ESL	OPT	SIZE	xxW	1	yy	OPTIONS
ESL	TYPE	SIZE	WATTS	GENERATION	KELVIN	
	OPT (Optus Series)	6 (Round 5/6") 8 (Round 8")	xW (10/15/22 Watts) xW (12/20/30 Watts)	1 (1st Generation)	30 (3000K) 40 (4000K) 50 (5000K)	

OPTIONS (ADD AS SUFFIX)



ESL-EMG-1AC-25W External Emergency Backup

	PRODUCTS	INPUT VOLTAGE	MAX LUMENS	WATTAGE SETTINGS (xxW)	KELVIN SETTINGS (yy)
6 INCH	ESL-OPT-6-xxW-1yy	110-277 VAC	1,950	10W • 15W • 22W •	• 3000K (30) • 4000K (40) • 5000K (50)
8 INCH	ESL-OPT-8-xxW-1yy	110-277 VAC	2,250	12W • 20W • 30W •	• 3000K (30) • 4000K (40) • 5000K (50)

DIMENSIONS

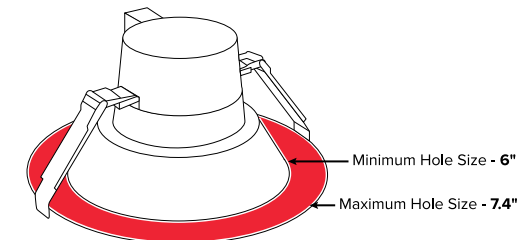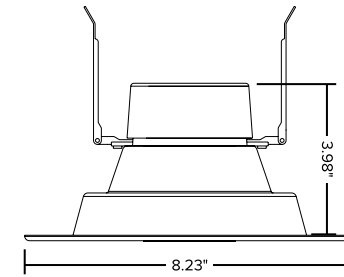

10 | 15 | 22 WATT

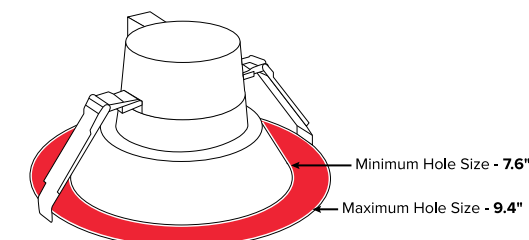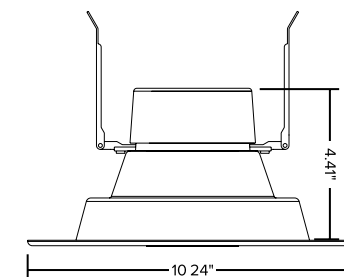

12 | 20 | 30 WATT



IC RATED



WWW.ESLVISION.COM

888.493.5559

Questions or Comments
www.eslvision.com
customerservice@eslvision.com
ESL Vision, LLC
1136 S 3600 W
Salt Lake City, UT, USA
Catalog# OPTUS-2019