

Key Features & Benefits:

- 5CCT Field Selectable
- Compatible with 3" and 4" J Boxes
- Wet Location Rated
- 120V Triac Dimmable
- T24 Compliant
- Easy Surface Mount Installation
- Optional Trim Kits*


Project: _____ Date: _____

Catalog #: _____


Notes: _____

Product Specifications:

Power: 25 Watts
 Selectable Kelvin: 2700K, 3000K, 3500K, 4000K, 5000K
 Lumen Output: Up to 1,874 Lumens
 Efficacy: Up to 79 lm/W
 Input Voltage: 120 VAC
 CRI: >90
 Operating Temperature: -4°F to 104°F
 Operational Lifetime: 50,000 hrs
 Dimensions: 11.06" x 11.06" x H 1.18"

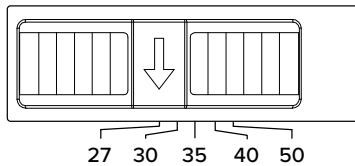

Easy Select Kelvin Switch on Backplate



Field Installable Trim Rings Available: Nickel, Copper, Bronze, Black, and Field Paintable Sold Separately



Ordering Guide:

ESL	TYPE	SIZE	WATTAGE	GENERATION	SELECTABLE KELVIN	VOLTAGE	EMERGENCY
ESL	DDSK (DDSK) Decorative Disk	S11 (S11) Square 11"	25W (25W) 25 Watts	1 (1) 1st Generation	2750 (2750) 2700K, 3000K, 3500K, 4000K, 5000K	(BLANK) 120 VAC	(BLANK) No Built-in EMG

*Accessories Sold Separately

FIELD INSTALLED ACCESSORIES

ESL-DDSK1-R5-Tff	5" DDSK field installable round trim kit*
ESL-DDSK1-S5-Tff	5" DDSK field installable square trim kit*
ESL-DDSK1-R7-Tff	7" DDSK field installable round trim kit*
ESL-DDSK1-S7-Tff	7" DDSK field installable square trim kit*
ESL-DDSK1-R9-Tff	9" DDSK field installable round trim kit*
ESL-DDSK1-S9-Tff	9" DDSK field installable square trim kit*
ESL-DDSK1-R11-Tff	11" DDSK field installable round trim kit*
ESL-DDSK1-S11-Tff	11" DDSK field installable square trim kit*

Finishes: (ff)=(MW) Field Paintable, (BK) Black, (BN) Brushed Nickel, (BZ) Bronze, (CP) Copper

*Contact ESL Representative for more information regarding Trim Kit lead times.

Catalog Data:

LED DECORATIVE DISK—TRIAC DIMMING

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CRI	INPUT VOLTAGE	DIMENSIONS		
5" ROUND		2700K	704	62	90	120 VAC	Ø 5.61" x H 1.18"		
ESL-DDSK-R5-11W-12750	11W	3000K	752	67					
		3500K	785	69					
		4000K	792	70					
		5000K	784	69					
5" SQUARE		2700K	670	59	90	120 VAC	5.59" x 5.59" x H 1.18"		
ESL-DDSK-S5-11W-12750	11W	3000K	716	64					
		3500K	733	66					
		4000K	735	65					
ESL-DDSK-S5-11W-12750	11W	5000K	727	65					
		7" ROUND		2700K	900	64	90	120 VAC	Ø 7.11" x H 1.18"
		ESL-DDSK-R7-14W-12750	14W	3000K	962	69			
				3500K	1004	72			
4000K	1035			74					
5000K	1004			73					
ESL-DDSK-R7-14W-12750-EMG	14W	2700K	1078	78					
		3000K	1143	84					
		3500K	1196	88					
		4000K	1219	91					
ESL-DDSK-R7-14W-12750-EMG	14W	5000K	1222	89					

Catalog Data:

LED DECORATIVE DISK—TRIAC DIMMING

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CRI	INPUT VOLTAGE	DIMENSIONS
7" SQUARE		2700K	862	62			
		3000K	914	66			
ESL-DDSK-S7-14W-12750	14W	3500K	946	69	90	120 VAC	7.09" x 7.09" x H 1.18"
		4000K	938	68			
		5000K	923	68			
ESL-DDSK-S7-14W-12750-EMG†		2700K	1,027	75			
		3000K	1,092	81			
ESL-DDSK-S7-14W-12750-EMG†	14W	3500K	1,159	87	90	120 VAC	7.09" x 7.09" x H 1.18"
		4000K	1,196	89			
		5000K	1,199	88			
9" ROUND		2700K	1,396	71			
		3000K	1,476	75			
ESL-DDSK-R9-20W-12750	20W	3500K	1,568	80	90	120 VAC	Ø 9.08" x H 1.18"
		4000K	1,576	80			
		5000K	1,569	80			
EESL-DDSK-R9-20W-12750-EMG		2700K	1,558	78			
		3000K	1,646	83			
EESL-DDSK-R9-20W-12750-EMG	20W	3500K	1,715	89	90	120 VAC	Ø 9.08" x H 1.18"
		4000K	1,746	89			
		5000K	1,738	89			
9" SQUARE		2700K	1,396	71			
		3000K	1,476	75			
ESL-DDSK-S9-20W-12750	20W	3500K	1,568	80	90	120 VAC	9.06" x 9.06" x H 1.18"
		4000K	1,576	80			
		5000K	1,569	80			
ESL-DDSK-S9-20W-12750-EMG†		2700K	1,371	72			
		3000K	1,437	77			
ESL-DDSK-S9-20W-12750-EMG†	20W	3500K	1,492	81	90	120 VAC	9.06" x 9.06" x H 1.18"
		4000K	1,512	81			
		5000K	1,470	78			
11" ROUND		2700K	1,768	71			
		3000K	1,866	75			
ESL-DDSK-R11-25W-12750	25W	3500K	2,005	81	90	120 VAC	Ø 11.05 x H 1.18"
		4000K	2,009	81			
		5000K	2,004	81			
11" SQUARE		2700K	1,760	71			
		3000K	1,887	76			
ESL-DDSK-S11-25W-12750	25W	3500K	1,966	80	90	120 VAC	11.02" x 11.02" x H 1.18"
		4000K	1,924	79			
		5000K	1,874	79			

†Contact your representative for lead times




Catalog Data:

LED DECORATIVE DISK—DUAL DIMMING MULTI-VOLT

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CRI	INPUT VOLTAGE	DIMENSIONS
7" ROUND MULTI-VOLT		2700K	1,135	84			
		3000K	1,203	91			
ESL-DDSK-R7-14W-12750-MV	14W	3500K	1,241	94	90	120-277V	Ø 7.11" x H 1.18"
		4000K	1,273	98			
		5000K	1,264	95			
7" SQUARE MULTI-VOLT		2700K	980	73			
		3000K	1,039	78			
ESL-DDSK-S7-14W-12750-MV	14W	3500K	1,078	83	90	120-277V	7.09" x 7.09" x H 1.18"
		4000K	1,088	83			
		5000K	1,058	79			
7" SQUARE MULTI-VOLT		2700	1007	73			
		3000	1085	80			
ESL-DDSK-S7-14W-12750-MV-EMG†	14W	3500	1132	85	90	120-277V	7.09" x 7.09" x H 1.18"
		4000	1148	86			
		5000	1126	83			
9" ROUND MULTI-VOLT		2700K	1,660	88			
		3000K	1,735	93			
ESL-DDSK-R9-20W-12750-MV	20W	3500K	1,789	97	90	120-277V	Ø 9.08" x H 1.18"
		4000K	1,854	101			
		5000K	1,843	99			
9" SQUARE MULTI-VOLT		2700K	1,665	86			
		3000K	1,750	93			
ESL-DDSK-R9-20W-12750-MV-EMG†	20W	3500K	1,832	98	90	120-277V	Ø 9.08" x H 1.18"
		4000K	1,869	98			
		5000K	1,864	98			
9" SQUARE MULTI-VOLT		2700K	1,462	80			
		3000K	1,542	86			
ESL-DDSK-S9-20W-12750-MV†	20W	3500K	1,608	91	90	120-277V	9.06" x 9.06" x H 1.18"
		4000K	1,616	91			
		5000K	1,571	86			
9" SQUARE MULTI-VOLT		2700	1329	72			
		3000	1395	77			
ESL-DDSK-S9-20W-12750-MV-EMG†	20W	3500	1461	82	90	120-277V	9.06" x 9.06" x H 1.18"
		4000	1485	83			
		5000	1458	80			

†Contact your representative for lead times

Dimensions:

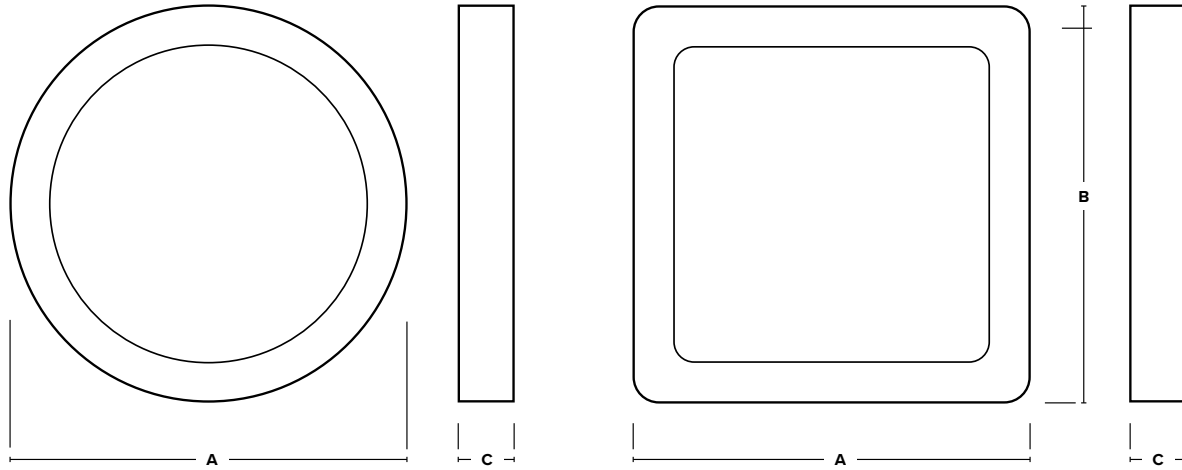

ITEM#	DIMENSIONS			WEIGHT (LBS)
	A	B	C	
5" ROUND				
ESL-DDSK-R5-11W-12750	Ø 5.61"	-	1.18"	0.57
ESL-DDSK-R5-11W-12750-MV	Ø 5.61"	-	1.18"	0.57
5" SQUARE				
ESL-DDSK-S5-11W-12750	5.59"	5.59"	1.18"	0.66
ESL-DDSK-S5-11W-12750-MV	5.59"	5.59"	1.18"	0.66
7" ROUND				
ESL-DDSK-R7-14W-12750	Ø 7.11"	-	1.18"	0.77
ESL-DDSK-R7-14W-12750-EMG	Ø 7.12"	-	1.18"	1.54
ESL-DDSK-R7-14W-12750-MV	Ø 7.11"	-	1.18"	0.88
ESL-DDSK-R7-14W-12750-MV-EMG	Ø 7.12"	-	1.18"	1.65
7" SQUARE				
ESL-D DSK-S7-14W-12750	7.09"	7.09"	1.18"	0.93
ESL-DDSK-S7-14W-12750-EMG	7.09"	7.09"	1.18"	1.87
ESL-DDSK-S7-14W-12750-MV	7.09"	7.09"	1.18"	1.87
ESL-DDSK-S7-14W-12750-MV-EMG	7.09"	7.09"	1.18"	1.87
9" ROUND				
ESL-DDSK-R9-20W-12750	Ø 9.08"	-	1.18"	1.04
ESL-DDSK-R9-20W-12750-EMG	Ø 9.06"	-	1.18"	1.87
ESL-DDSK-R9-20W-12750-MV	Ø 9.06"	-	1.18"	1.34
ESL-DDSK-R9-20W-12750-MV-EMG	Ø 9.06"	-	1.18"	1.87
9" SQUARE				
ESL-DDSK-S9-20W-12750	9.06"	9.06"	1.18"	1.32
ESL-DDSK-S9-20W-12750-EMG	9.06"	9.06"	1.18"	2.29
ESL-DDSK-S9-20W-12750-MV	9.06"	9.06"	1.18"	1.32
ESL-DDSK-S9-20W-12750-MV-EMG	9.06"	9.06"	1.18"	1.32
11" ROUND				
ESL-DDSK-R11-25W-12750	Ø 11.05"	-	1.18"	1.43
ESL-DDSK-R11-25W-12750-MV	Ø 11.05"	-	1.18"	1.43
11" SQUARE				
ESL-DDSK-S11-25W-12750	11.02"	11.02"	1.18"	1.43
ESL-DDSK-S11-25W-12750-MV	11.02"	11.02"	1.18"	1.43

DDSK Compatible Dimmers:

NON-EMG TRIAC DDSK COMPATIBLE DIMMERS

Lutron DVCL-153P

Lutron LECL-153PH

Lutron LECL-153PH

Lutron CTCL-153PH

Leviton 6672

Leviton 6674

Leviton IPSD6

Leviton DSL06

Leviton IPL06

Leviton DSM10

EMG TRIAC DDSK COMPATIBLE DIMMERS

Lutron DVCL-153P

Lutron DVCL-303

Lutron LECL-153PH

Lutron CT-600P

Lutron CTCL-153PH

Leviton 6672

Leviton 6674

Leviton DSL06

Leviton IPL06

Leviton DSM10

Leviton PD-6WCL

DDSK-MV Compatible Dimmers:

REGULAR AND EMG TRIAC DDSK COMPATIBLE DIMMERS

Lutron DVCL-153P Diva

Lutron DVWCL-153PH Diva

Lutron LECL-153PH-WH Lunea

Lutron TGCL-153PH

Lutron CTCL-153PH Skylark

Leviton 6672

Leviton 6674

Leviton IPSD6

Leviton DSL06

Leviton IPL06

Leviton DSM10

Cooper TAL06P-C2