

**Key Features & Benefits:**

- Selectable CCT and Wattage
- Strong Spring Clips Secure Fixture to Drywall, Ceiling Tiles, or Mounting Plate
- Multiple Color Trim Ring Accessories
- Wet Location Rated
- Energy Star Listed
- Cast Aluminum Housing and Trim

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_



**Product Specifications:**

- Selectable Wattage: 9–12–19 Watts
- Selectable Kelvin: 3000K, 3500K, 4000K, 5000K
- Lumens: 900–1,200–2,000 Lumens
- Efficacy: Up to 105 lm/W
- CRI: 90+
- Input Voltage: 110–277 VAC
- Power Factor: >0.98
- Input Frequency: 50/60Hz
- Operating Temperature: -4°F to 104°F
- Operational Lifetime: 50,000 Hrs
- Dimming: 1–10V
- Product Weight (lbs) 1.06

**Dimensions:**

- Fixture: 7.36"Ø x 3.97"
- Flexible Metal Conduit (MC) Length: 24"
- Wire Leads Length: 8.25"



### Ordering Guide:

ESL	TYPE	SIZE	SELECTABLE WATTAGE	GENERATION	SELECTABLE KELVIN	OPTIONS
ESL	OPT (OPT) Optus Series	6 (6) Round 6"	0919W (0919W) 9–12–19 Watts	2 (2) 2nd Generation	3050K (3050K) 3000K–3500K–4000K–5000K	

### FACTORY INSTALLED OPTIONS

EM8	Emergency Backup Battery Unit, Auto Test Function, 8 Watts Ouput, 90 Minutes MIn, 100-347VAC Input, 170VDC Ouput, Closed Frame with Flex Conduits, UL Listed for Factory or Field install, Li-ion Battery
-----	---

### FIELD INSTALLED ACCESSORIES

ESL-OPT2-4-Tff	4" OPTUS Field Installable Trim Kit
ESL-OPT2-6-Tff	6" OPTUS Field Installable Trim Kit
ESL-OPT2-8-Tff	8" OPTUS Field Installable Trim Kit
ESL-OPT2-10-Tff	10" OPTUS Field Installable Trim Kit
ESL-OPT2-4-RING	4" to 6" Goof Ring
ESL-OPT2-6-RING	6" to 8" Goof Ring
ESL-OPT2-8-RING	8" to 10" Goof Ring
ESL-OPT2-10-RING	10" to 12" Goof Ring
ESL-RDL-4-RKIT-001	4" New Construction Downlight Rough-In plate
ESL-RDL-6-RKIT-001	6" New Construction Downlight Rough-In plate
ESL-RDL-8-RKIT-001	8" New Construction Downlight Rough-In plate

Finishes: (ff)=(MW) Field Paintable, (BK) Black, (BN) Brushed Nickel, (BZ) Bronze, (CP) Copper

### AVAILABLE ACCESSORIES SOLD SEPARATELY




Trim Ring  
Black



Trim Ring  
Brushed  
Nickel



Trim Ring  
Copper



Trim Ring  
Field  
Paintable




Goof Ring

### Catalog Data:


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	DIMENSIONS
4" ESL-OPT-4-0712W-23050K	7W–9W–12W	3000K, 3500K, 4000K, 5000K	600–800–1,000	89	120–277 VAC	Ø5.51" x 3.65"
6" ESL-OPT-6-0919W-23050K	9W–12W–19W	3000K, 3500K, 4000K, 5000K	900–1,200–2,000	105	120–277 VAC	Ø7.36" x 3.97"
8" ESL-OPT-8-1129W-23050K	11W–19W–29W	3000K, 3500K, 4000K, 5000K	1,200–2,000–3,000	105	120–277 VAC	Ø9.45" x 4.35"
10" ESL-OPT-10-1836W-23050K	18W–27W–36W	3000K, 3500K, 4000K, 5000K	2,000–3,000–4,000	111	120–277 VAC	Ø11.26" x 4.37"

**Dimensions:**


**4" Fixture**

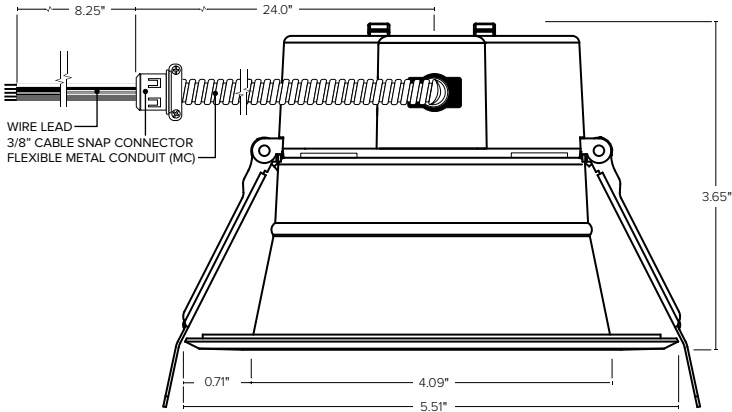

**6" Fixture**

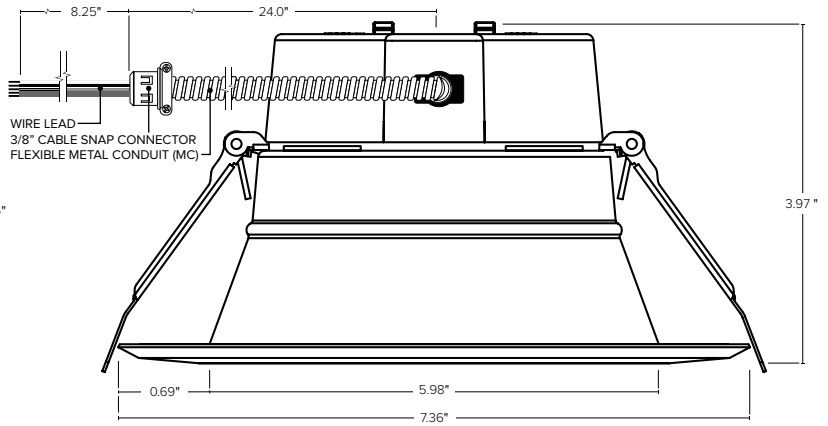

**8" Fixture**

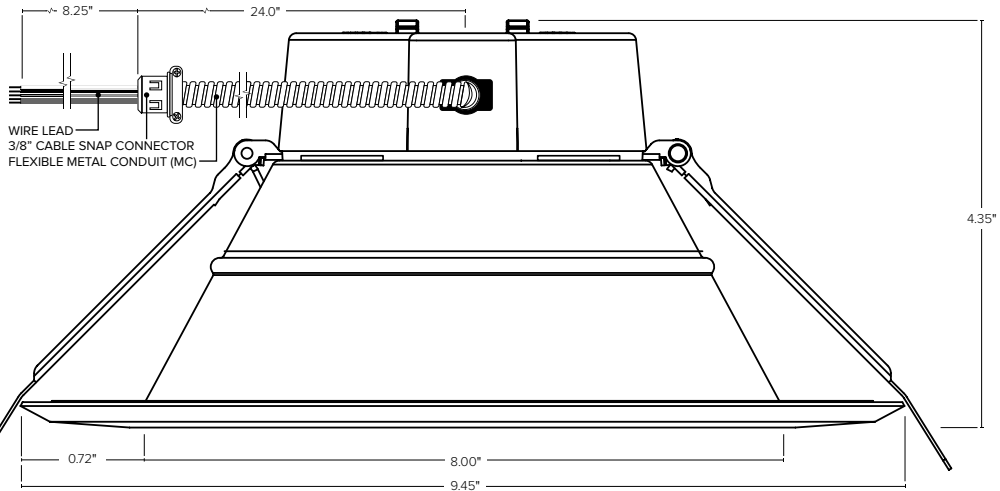

**10" Fixture**

