

Key Features & Benefits:

- Selectable Kelvin
2700K–3000K–3500K–4000K–5000K
- Triac Dimmable (120 VAC)
- 90 CRI
- Frosted Lens Produces Smooth, Diffused Light
- 5 Year Warranty

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 9 Watts
 Selectable Kelvin:
 2700K–3000K–3500K–4000K–5000K
 Lumen Output: Up to 800
 Efficacy (lm/W): Up to 89 Lumens per Watt
 Input Voltage: 120 VAC
 CRI: 90+
 Base: GU24
 Operational Lifetime: 15,000 hrs
 Dimensions: Ø 2.36" x 4.17"




Ordering Guide:

| ESL | - | TYPE | - | WATTS | - | GENERATION | - | SELECTABLE KELVIN | - | BASE |
|-----|---|----------------|---|--------------|---|--------------------|---|--------------------------------------|---|-----------------------------------|
| ESL | - | A19 | - | 9W | - | 1 | - | 2750 | - | GU24 |
| | | (A19) A19 Lamp | | (9W) 9 Watts | | (1) 1st Generation | | (2750) 2700K–3000K–3500K–4000K–5000K | | (GU24) GU24 Base* *9 Watt Only |

Catalog Data:

| ITEM# | WATTAGE | WATTAGE EQUIVALENCY | SELECTABLE KELVIN | MAX LUMEN OUTPUT | MAX EFFICACY (lm/w) | DIMENSIONS |
|-----------------------|---------|---------------------|-------------------------------|------------------|---------------------|-------------------|
| ESL-A19-6W-12750 | 6W | 40W | 2700K–3000K–3500K–4000K–5000K | 480 | 80 | Ø 2.36" x H 4.33" |
| ESL-A19-9W-12750 | 9W | 60W | 2700K–3000K–3500K–4000K–5000K | 800 | 89 | Ø 2.36" x H 4.33" |
| ESL-A19-11W-12750 | 11W | 75W | 2700K–3000K–3500K–4000K–5000K | 1,100 | 100 | Ø 2.36" x H 4.57" |
| ESL-A19-15W-12750 | 15W | 100W | 2700K–3000K–3500K–4000K–5000K | 1,600 | 107 | Ø 2.36" x H 4.57" |
| ESL-A19-9W-12750-GU24 | 9W | 60W | 2700K–3000K–3500K–4000K–5000K | 800 | 89 | Ø 2.36" x H 4.17" |

Dimensions:

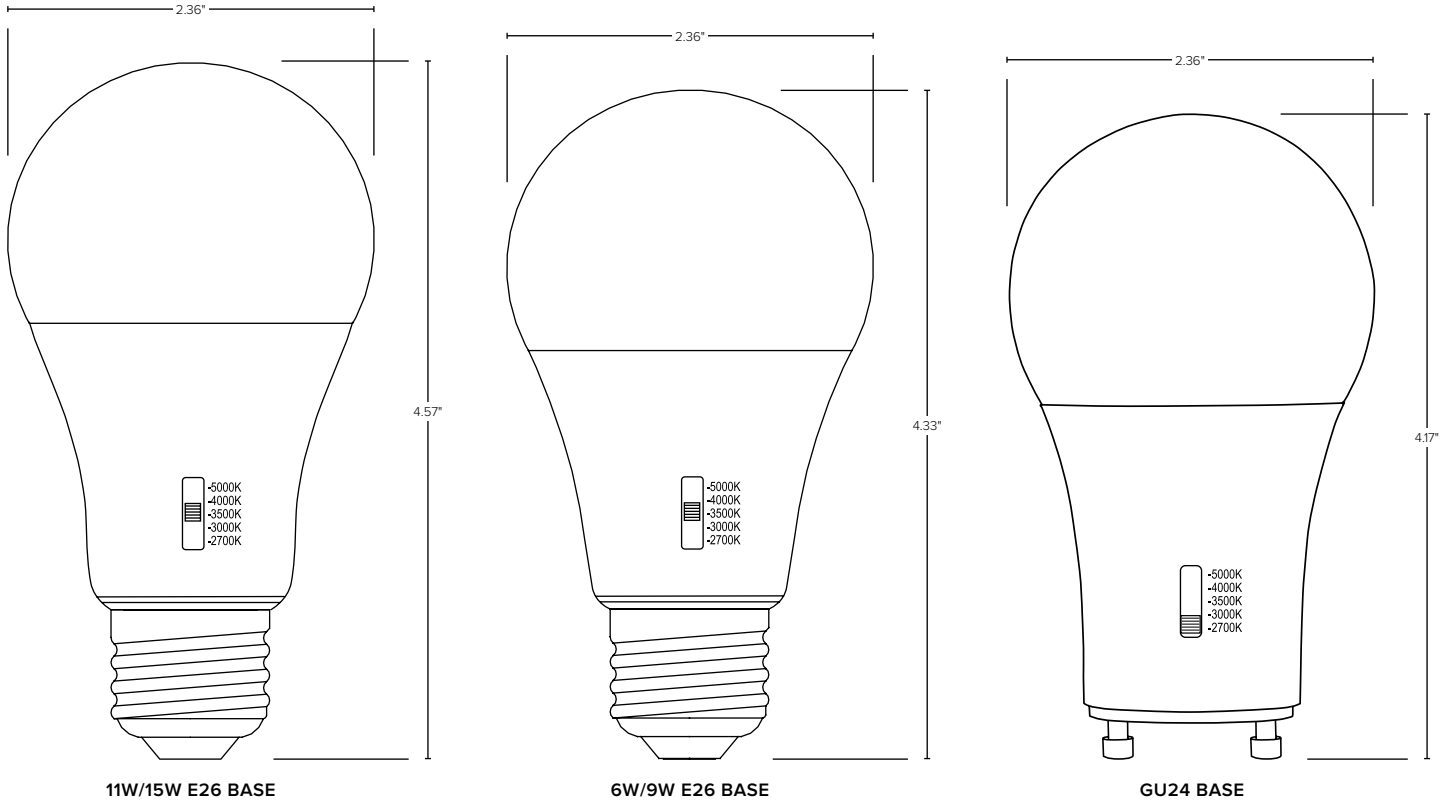

Compatible Dimmers:

COMPATIBLE DIMMERS

6674 LEVITON

DVCL-153P LUTRON

CTCL-153P LUTRON

TGCL-153P LUTRON

MAELV-600 LUTRON