


### Key Features & Benefits:

- Double Ended or Single Ended Wiring
- Glass Construction with Shatterproof Coating
- Integral Driver (Isolated)

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Product Specifications:

Wattage: 25 Watts  
 Selectable Kelvin: 4000K–5000K–6500K  
 Lumen Output: Up to 3,500 Lumens  
 Efficacy: Up to 140 lm/W  
 Color Rendering Index (CRI): >80  
 Input Voltage: 120–277 VAC  
 Material: Glass with Shatterproof Coating  
 Power Factor: >0.9  
 Base Type: G5  
 Operating Temperature: -4°F to 113°F  
 NSF/ANSI 2: Food Equipment Standard by ETL  
 Rated Life (hrs): 50,000 Hours  
 Measurement (ØxL): Ø0.83" x 45.23"  
 Weight (lbs): 0.40 Pounds



### Ordering Guide:


ESL	T5	TYPE	WATTAGE	LENS	GENERATION	SELECTABLE KELVIN
ESL	T5 (T5) T5 Tube	HOB4 (HOB4) High Output Type B, 4 Foot	25W (25W) 25 Watts	F (F) Frosted	1 (1) 1st Generation	4065 (4065) 4000K–5000K–6500K

### Catalog Data:


ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	DLC QPL CODE
ESL-T5HOB4-25W-F14065	25W	4000K–5000K–6500K	3,500	140	120–277 VAC	S-RYKCPZ

### T5HOB Wire Diagrams (Type B):

#### Before Upgrade:

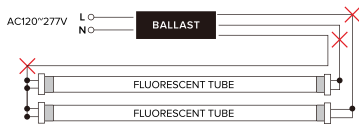

#### After Upgrade:

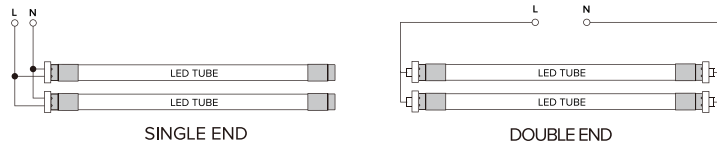

### Dimensions:

**4 Foot**  
 ESL-T5HOB4-25W-F14065  
 Ø0.83" x 45.23"

