

AWC-LWP6 SERIES - 60W - P

Descriptions


The Traditional LED Wall Pack offers ADJUSTABLE COLOR TEMPERATURE (CCT) and ADJUSTABLE WATTAGE on all models. Ideal for outdoor commercial areas such as retail centers, loading docks, or warehouse exteriors. CCT and Wattage outputs are tuned via built-in switch located on the outside of the fixture. Ranges from 30W (3,818 lumens) to 150W (19,384 lumens). Set CCT levels to either 3000K, 4000K, or 5000K. Includes photocell with ON/OFF switch. UL Listed for Wet Locations. DLC Premium Listed.



General Specifications


	Spec	AWC-LWP6-60W-P
Electrical	Input Voltage	120~277V
	Wattage	30W/40W/60W
	Power Factor	> 0.9
Light Output	Lumens	3818lm/5091lm/7636lm
	Efficacy	127 lm/W
	CRI	70+
	Color Temp.	3000K/4000K/5000K
	BUG	B2-U4-G4
	Distribution Type	TYPE IV
	Equivalent	100W/150W/175W
Physical	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic Borosilicate Molded Lens with Weatherproof Gasket
	Ambient Operating Temp	-40°C / -40°F to 40°C / 104°F
Other	Mount	Wall Mount
	Certification	cULus E335594; DLC 5.1 Premium
	DLC Product ID	S-1XUHJ7

Dimensions

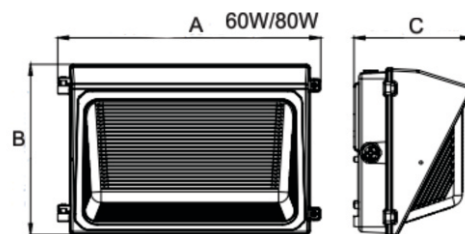

A x B x C:
60W: 14-5/16" x 9-1/4" x 6-3/8"

Photometrics

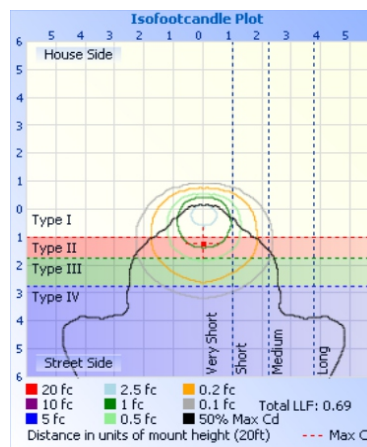

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **92° x 108°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable: **0-10V/PWM/VR**
- ▶ **UL listed for Wet Location**



Item No.	Description	Std. Pkg.
AWC-LWP6-60W-P	AWC-LWP6 LED WALL PACK, 60W 120~277V 3000/4000/5000K	2



AWC-LWP6 SERIES - 80W - P

Descriptions


The Traditional LED Wall Pack offers ADJUSTABLE COLOR TEMPERATURE (CCT) and ADJUSTABLE WATTAGE on all models. Ideal for outdoor commercial areas such as retail centers, loading docks, or warehouse exteriors. CCT and Wattage outputs are tuned via built-in switch located on the outside of the fixture. Ranges from 30W (3,818 lumens) to 150W (19,384 lumens). Set CCT levels to either 3000K, 4000K, or 5000K. Includes photocell with ON/OFF switch. UL Listed for Wet Locations. DLC Premium Listed.



General Specifications


	Spec	AWC-LWP6-80W-P
Electrical	Input Voltage	120~277V
	Wattage	50W/60W/80W
	Power Factor	> 0.9
Light Output	Lumens	6551lm/7862lm/10482lm
	Efficacy	131 lm/W
	CRI	70+
	Color Temp.	3000K/4000K/5000K
	BUG	B2-U4-G5
	Distribution Type	TYPE IV
	Equivalent	175W/175W/250W
Physical	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic Borosilicate Molded Lens with Weatherproof Gasket
	Ambient Operating Temp	-40°C / -40°F to 40°C / 104°F
Other	Mount	Wall Mount
	Certification	cULus E335594; DLC 5.1 Premium
	DLC Product ID	S-RLKHDT

Dimensions

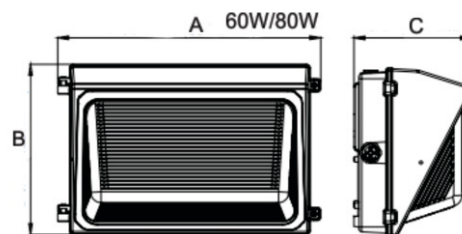

A x B x C:
 80W: 14-5/16" x 9-1/4" x 6-3/8"

Photometrics

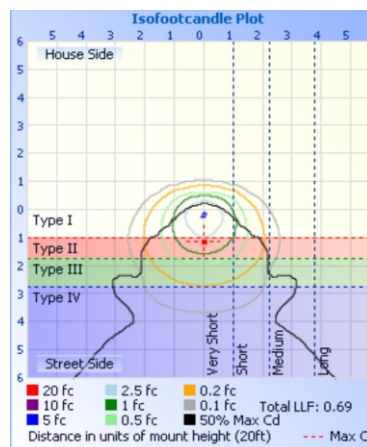

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **102° x 110°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable: **0-10V/PWM/VR**
- ▶ **UL listed for Wet Location**



Item No.	Description	Std. Pkg.
AWC-LWP6-80W-P	AWC-LWP6 LED WALL PACK, 80W 120~277V 3000/4000/5000K	2



AWC-LWP6 SERIES - 150W - P

Descriptions


The Traditional LED Wall Pack offers ADJUSTABLE COLOR TEMPERATURE (CCT) and ADJUSTABLE WATTAGE on all models. Ideal for outdoor commercial areas such as retail centers, loading docks, or warehouse exteriors. CCT and Wattage outputs are tuned via built-in switch located on the outside of the fixture. Ranges from 30W (3,818 lumens) to 150W (19,384 lumens). Set CCT levels to either 3000K, 4000K, or 5000K. Includes photocell with ON/OFF switch. UL Listed for Wet Locations. DLC Premium Listed.



General Specifications


	Spec	AWC-LWP6-150W-P
Electrical	Input Voltage	120~277V
	Wattage	100W/120W/150W
	Power Factor	> 0.9
Light Output	Lumens	12923lm/15507lm/19384lm
	Efficacy	129 lm/W
	CRI	70+
	Color Temp.	3000K/4000K/5000K
	BUG	B3-U5-G5
	Distribution Type	TYPE IV
	Equivalent	400W/400W/750W
Physical	Housing	ADC12 Die Cast Aluminum
	Finish	UV Resistant Bronze Powder Coat Finish
	Lens Material	Prismatic Borosilicate Molded Lens with Weatherproof Gasket
	Ambient Operating Temp	-40°C / -40°F to 40°C / 104°F
	Mount	Wall Mount
Other	Certification	cULus E335594; DLC 5.1 Premium
	DLC Product ID	S-S5M30G

Dimensions

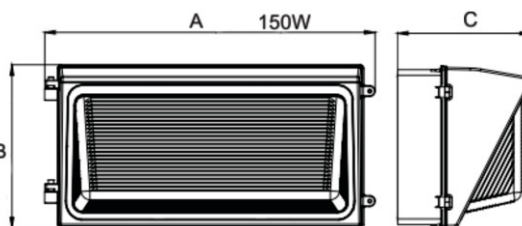

A x B x C:
 150W: 18-1/2" x 9-1/8" x 7-7/16"

Photometrics

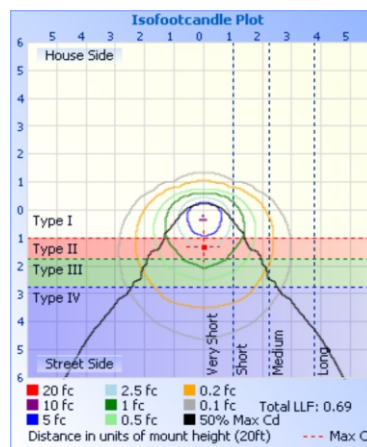

- ▶ Lifespan: **50,000 hrs**
- ▶ Beam Angle: **95° x 113°**
- ▶ Warranty: **5 Year Limited Warranty**
- ▶ Dimmable: **0-10V/PWM/VR**
- ▶ **UL listed for Wet Location**



Item No.	Description	Std. Pkg.
AWC-LWP6-150W-P	AWC-LWP6 LED WALL PACK, 150W 120~277V 3000/4000/5000K	1

