WMXPRO SERIES LED OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WMXPRO-MD-20-60W-MCTP

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


Customer Name:

Project Name:

Note: | Type:



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

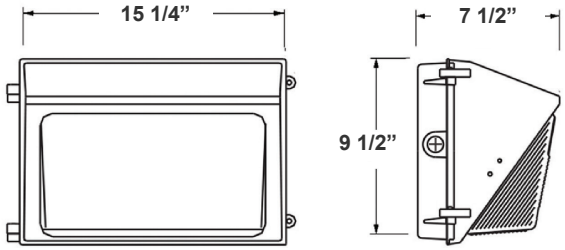

15 1/4”(W) x 9 1/2”(H) x 7 1/2”(D)

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Connect One End or Both Ends (Dual Function)
- Multi Color Temperature & Multi Power/Wattage (Switches are inside fixture)
- 7-year warranty
- Prismatic Borosilicate Glass Lens

Technical Specifications

Electrical:

- Input Wattage: 20/30/50/60W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 0.6A
- Power factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- Same Footprint as Traditional HID Wall Packs
- Four 1/2” Hubs: 1 top. 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Multi Color Temperature & Multi Power/Wattage (Switches are inside fixture)
- Dimming: 0-10V Dimming
- Chip: Lumileds LEDs
- Multi Power & CCT (Switches are inside fixture)
- Total Lumens: 8100LM Max.
- Color Temperature: 3000K/4000K/5000K/5700K
- CRI: >70

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:


• 30W | 4200LM | WMXPRO-SM-15-30W-MCTP • 80W | 11200LM | WMXPRO-MD-20-80W-MCTP• 120W | 16500LM | WMXPRO-LG-50-120W-MCTP


UL LISTED · DLC Except 30K · DIMMING · 7 YEAR LIMITED WARRANTY · IP65 · WET LOCATION


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

WG-ZC-2D-2Z

Photometrics: WMXPRO-MD-20-60W-MCTP





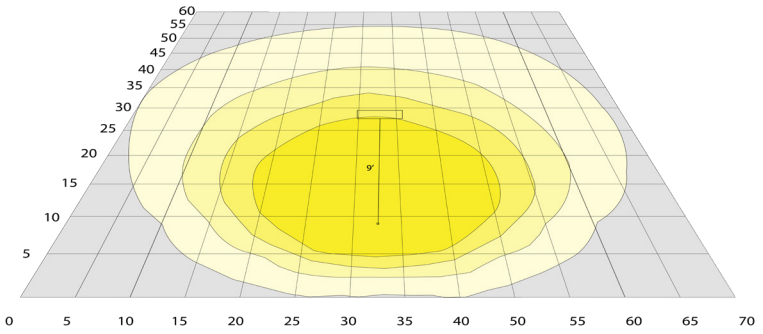

BUG Rating: B2-U3-G3

Area 60'x 65' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: WMXPRO-MD-20-60W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMXPRO-MD-20-60W-MCTP	20W	120-277V	2600LM	3000K 4000K 5000K 5700K	B2-U3-G3	130
	30W		3900LM			
	50W		6500LM			
	60W		7800LM			

Sample Ordering

Model		Size		Min. Watt		Max. Watt		Watt/Color Temp.
WMXPRO	-	MD	-	20	-	60W	-	MCTP

Accessories:

Blank = No Option For Accessories
WML-SH2= SHIELD FOR WMXPRO-MD

Factory-Installed Options:


Blank = No Option For Accessories
OPT-EM-OD3INT= INTERNAL EMERGENCY BACKUP BATTERY
OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W & UP)
OPT-PC-B= BUTTON
OPT-TRS-T20= TAMPER RESISTANT SCREW
OPT-CLR-95= COLOR PAINT
WEC-8RC= REMOTE CONTROL

ACCESSORY:



WML-SH2

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD3INT



OPT-PC-B



WEC-8RC



OPT-SEN-3MRLV-5

Dimensions:



WML-SH2
SHIELD FOR WMXPRO MD

