WESTGATE
America's Most Dependable Lighting

WPV SERIES

OUTDOOR LIGHTING

WPV-12W-MCT-DT

VANDAL-PROOF OUTDOOR WALL LIGHT

Customer Name:


Project Name:

Note: | Type:

LED Versatile Wall Pack is ideal for general site lighting, loading docks, doorway, pathway and parking areas.



WHITE

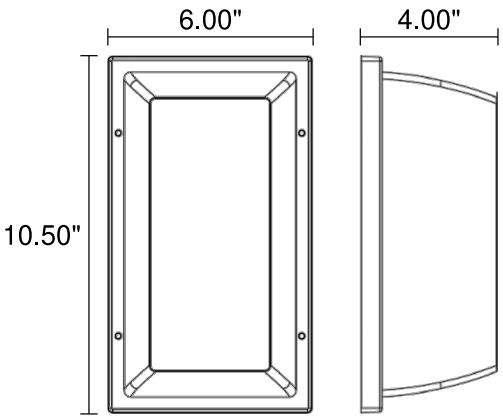

Technical Drawing: 6.00" (W) x 4.00" (D) x 10.50" (H)

FEATURES

- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- High Lumen
- ADC12 Aluminum Heat Sink, Outdoor Powder Coated
- Vandal Resistant Housing Ideal for Exposed Areas
- 7-year warranty

SPECIFICATIONS

ELECTRICAL

- Voltage: 120VAC, 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 80lm/W

MECHANICAL

- Steel Housing
- High Light Transmittance, Anti-UV and Fire Resistant
- Shatterproof PC Lens
- Dimensions: 6" (W) x 4" (D) x 10 1/2" (H)
- Operating Temperature: -40°F to 104°F
- Lifespan: 70,000 hours
- 7-year warranty
- IP Rating: IP54, Wet Locations

LIGHTING

- Dimmable: TRIAC Dimming
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Lumens Range: 960lm
- Color Temperatures: 3000K / 4000K / 5000K
- Color Rendering Index: CRI ≥70
- Beam Angle: 110° x 130°

APPLICATIONS


- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.


PERFORMANCE TABLE

MODEL NAMES	WATTAGE	VOLTAGE	LUMENS	COLOR TEMP.	LPW
WPV-12W-MCT-DT	12W	120V	960lm	3000K 4000K 5000K	80

Phone/Fax: (877) 805-2252
www.westgatemfg.com

PHOTOMETRICS WPV-12W-MCT-DT

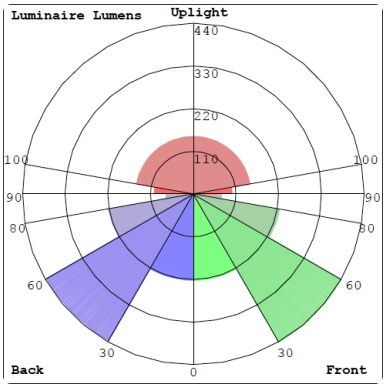

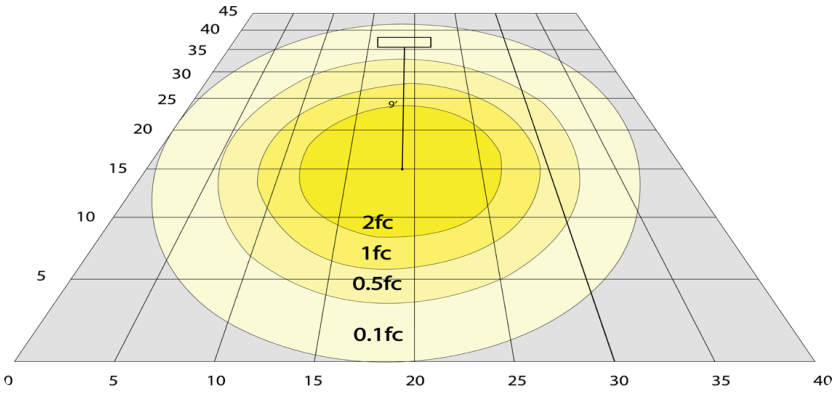

BUG: B1-U3-G1

OTHER VIEWS



SIDE VIEW



FRONT VIEW



BACK VIEW

FACTORY-INSTALLED OPTIONS

OPTION	DESCRIPTION	IMAGE
OPT-EM-WMV	Emergency backup internal battery, back box	
OPT-SEN-3MRLV-5	Programmable microwave bi-level sensor	
OPT-CLR-70(BK/GR/SR/WH)	Color paint	
OPT-CLR-70MC	Color paint (260 set up fee per project)	
OPT-TRS-T20	Tamper resistant screw	

Phone/Fax: (877) 805-2252
www.westgatemfg.com