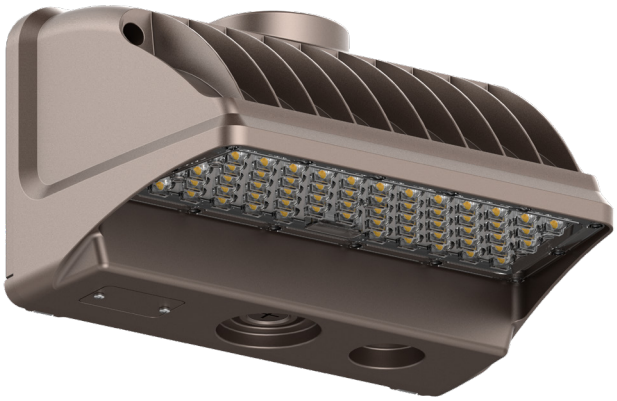
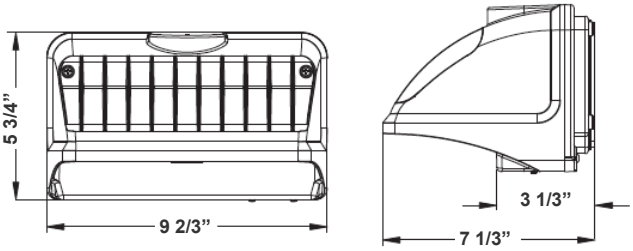
WPX SERIES Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WPX-42W-MCTP
LED CUT-OFF WALL PACK
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name:
Project Name:
Note: | Type:





LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals,etc.

9 2/3" (W) x 5 3/4" (H) x 7 1/3" (D)

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- 7-Year Warranty
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Multi CCT and Power (Switches are inside fixture

Technical Specification

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 11W/ 21W/ 32W/ 42W
- Power Factor: >0.95
- Efficacy: 135 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Operating Temperature: -40°F to 104°F
- IP 65
- Wet Location
- 7-Year Warranty
- Full Cutoff, Dark sky Compliant

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture
- The Type III Distribution Is Used for Wide WalkWays, on Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 5670LM Max.
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 Hrs

Applications:

- LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.


Other Models:

- 80W | 10800LM | WPX-80W-MCTP

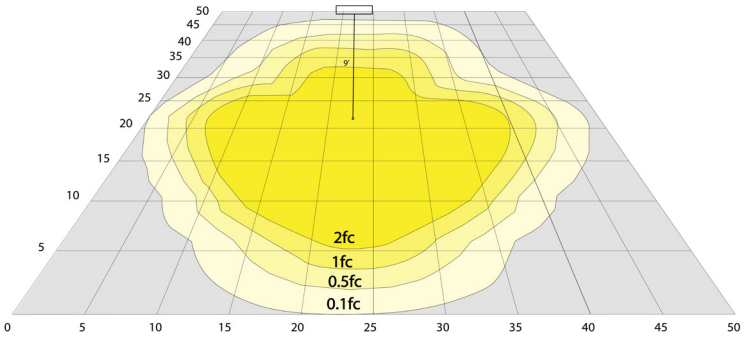
Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co

WG-ZY-Z4-2Z

Photometrics: WPX-42W-MCTP



BUD Rating: B0-U0-G1



Area 45'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WPX-42W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WPX-42W-MCTP	11W	120~277V	1485LM	3000K 4000K 5000K	B0-U0-G1	135
	21W		2835LM			
	32W		4320LM			
	42W		5670LM			

Sample Ordering

Model	Wattage.	Color Temp.
WPX	42W	MCTP

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-WPX-42 = INTERNAL EMERGENCY BACKUP BATTERY
OPT-3PDR-52 = PROGRAMMABLE MICROWAVE BI-LEVEL
OPT-CLR-85 = COLOR PAINT
OPT-TRS-T20 = TAMPER RESISTANT SCREW
OPT-PC-B = PHOTOCELL 120-277V

FACTORY-INSTALLED OPTIONS:



OPT-EM-WPX-42



OPT-3PDR-52



OPT-PC-B

COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:


SILVER METALLIC
70 GLOSS
T357-GR105


SILVER METALLIC
30 GLOSS
T353-GR06



DARK RED 90
GLOSS
P009-RD02



INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26


SAFETY ORANGE
90 GLOSS
T009-OG01


YELLOW 90
GLOSS
T009-YL14


YELLOW 90
GLOSS
T009-YL01


TRAFFIC GREEN
70 GLOSS
T007-GN16


GREEN 70 GLOSS
T007-GN13


GREEN 60 GLOSS
C006-GN03


BLUE 90 GLOSS
T009-BL01


DARK BLUE 80
GLOSS
T008-BL20


RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:

WHITE HAMMER
T013-WH09


BEIGE HAMMER
T013-BG38



GREY HAMMER
C013-GR08


SILVER
HAMMERTONE
T064-GR05


BLACK HAMMER
T013-BK62


RED HAMMER
T013-RD15


GREEN HAMMER
T013-GN220


BLUE HAMMER
T013-BL468


BRONZE HAMMER
T012-BR161

Texture:

WHITE TEXTURE
C031-WH120


FLINT GRAY
TEXTURE
T243-GR522


BLACK TEXTURE
C241-BK109


RED TEXTURE
T241-RD129


BLUE TEXTURE
C241-BL544


OIL RUBBED
BRONZE TEXTURE
T291-BR251

Vein:


BLACK/WHITE
VEIN
T075-WH34


SILVER VEIN
T375-BK26


COPPER VEIN
EXTERIOR
T075-BK211


GOLD VEIN
T375-BK10


COPPER VEIN
T375-BK07