EMERGENCY SERIES EMERGENCY HOTSPOT-ESL-EMG-KIT-8W ISION Page 1 of 1 **Key Features & Benefits:** Project: Date: • Easy Installation, Small Size Catalog #: - Will fit nearly any Luminaire Notes: • Provides 90 minutes Emergency Light Low Power Consumption • Illuminated Test Switch · Switches to Emergency Mode when Power Fails • ROHS and FCC Part 15 Compliant EMERGENCY LED DRIVER ESL-EMG-KITI-8W UL YEAR 5 CERTIFIED DAMP LOCATION **E** 51. **Product Specifications:** Wattage: 8 Watts Charging Time: 24 hrs Emergency Light Time: 90 minutes Operating Temperature: -41°F to 122°F (-20°C to 50°C) Lumens: Up to 1,200 Lumens Input Voltage: 120-277 VAC Efficacy (Im/W): 150 Im/W Input Frequency: 50/60Hz


Ordering Guide:



Catalog Data:

ITEM#	WATTAGE	MAX LUMEN OUTPUT	MAX EFFICACY (Im/W)	INPUT VOLTAGE	EMERGENCY LIGHT TIME
ESL-EMG-KIT1-8W	8W	1,200	150	120–277 VAC	90 Minutes

Dimensions:

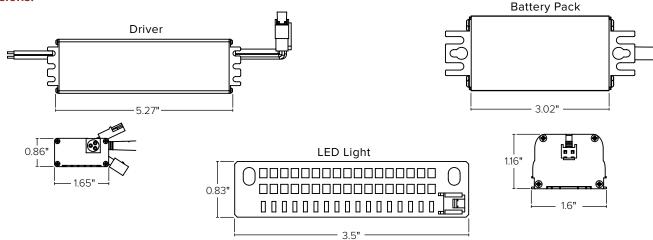

Copyright © 2022 ESL Vision, LLC. All rights reserved. Rev: 06/03/22