

Key Features & Benefits:

- Selectable Kelvin
2700K–3000K–3500K–4000K–5000K
- Triac Dimmable (120 VAC)
- 90 CRI
- Frosted Lens Produces Smooth, Diffused Light
- 5 Year Warranty

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 11 Watts

Selectable Kelvin:

2700K–3000K–3500K–4000K–5000K

Lumen Output: Up to 1,100

Efficacy (lm/W): Up to 100 Lumens per Watt

Input Voltage: 120 VAC

CRI: 90+

Base: E26

Operational Lifetime: 15,000 hrs

Dimensions: Ø 2.36" x 4.57"




Ordering Guide:

ESL	-	TYPE	-	WATTS	-	GENERATION	-	SELECTABLE KELVIN	-	BASE
ESL	-	A19	-	11W	-	1	-	2750	-	
		(A19) A19 Lamp		(11W) 11 Watts		(1) 1st Generation		(2750) 2700K–3000K–3500K–4000K–5000K		(Blank) E26 Base

Catalog Data:

ITEM#	WATTAGE	WATTAGE EQUIVALENCY	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS
ESL-A19-6W-12750	6W	40W	2700K–3000K–3500K–4000K–5000K	480	80	Ø 2.36" x H 4.33"
ESL-A19-9W-12750	9W	60W	2700K–3000K–3500K–4000K–5000K	800	89	Ø 2.36" x H 4.33"
ESL-A19-11W-12750	11W	75W	2700K–3000K–3500K–4000K–5000K	1,100	100	Ø 2.36" x H 4.57"
ESL-A19-15W-12750	15W	100W	2700K–3000K–3500K–4000K–5000K	1,600	107	Ø 2.36" x H 4.57"
ESL-A19-9W-12750-GU24	9W	60W	2700K–3000K–3500K–4000K–5000K	800	89	Ø 2.36" x H 4.17"

Dimensions:

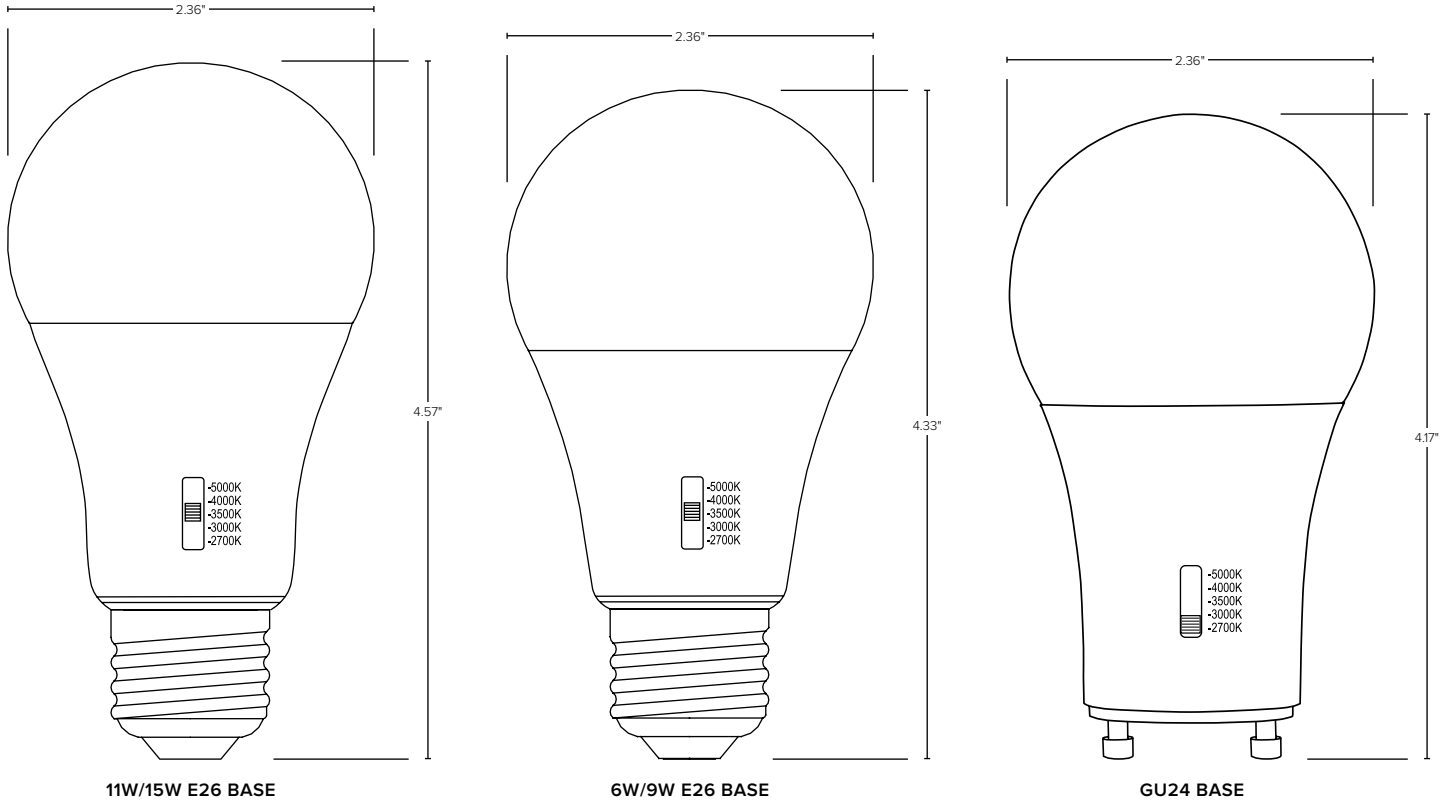

Compatible Dimmers:

COMPATIBLE DIMMERS
6674 LEVITON
DVCL-153P LUTRON
CTCL-153P LUTRON
TGCL-153P LUTRON
MAELV-600 LUTRON